


# PT20D

## INTRODUCTION

The PT20D series is a multi-functional truck when it comes to the handling of materials by combining the features of a pedestrian pallet truck and stacker in one truck.

It handles not only the transporting of the goods horizontally but also handles loading and unloading HGVs(Heavy goods vehicle) and stacking of pallets with max. lift height up to 2500mm, what's more, with its double lifting function, it is able to lift two Euro pallets at the same time. All operations can therefore be performed twice as quickly in comparison with a traditional pedestrian pallet truck or stacker. The PT20D can carry 2000kg when used as a pallet truck, 1000kg with the forks raised or 2x1000kg in double-deck operation.

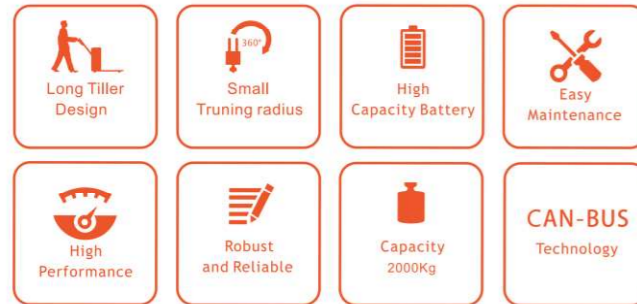

### ADVANTAGE:

- Power pallet truck with additional health-friendly mast lift.
- AC drive system
- Long tiller for easy and economic operations
- Double-lift with max. lift height up to 1600/2000/2500mm
- Core components from top quality brands
- Proportional lifting and lowering for accurate control of lift heights



## CAN-BUS



### Long tiller design

Ergonomically designed long tiller allows comfortable and efficient operation, and at the same time safety for the operator by keeping a safe distance.



### Sideway battery exchange

Standard powerful 210Ah battery with battery sideway battery replacement for easy battery replacement, maintenance and multi-shift operation.



### Double lifting design

With its double lifting function, the efficiency is doubled than the traditional pedestrian pallet truck or stacker. The raising support arms with bigger ground clearance also contribute to safe travel, for instance on thresholds, ramps and uneven floors. And with its low overall height, it comes with excellent view of operation.



### Robust and reliable design

The robust chassis with the strong 8mm thick apron protects the truck and the components against mechanical impacts from the outside. The steel battery cover ensures the battery well protected.



### Side switch


The standard equipped sideways located lifting and lowering buttons makes the lifting and lowering of the goods much easier and safer when the operator need to monitor the height closely from the side.



### Convenient Maintenance

To easier the maintenance has been considered during the vehicle design and parts selection. For example, all the parts to be within arms reach after removing the enclosure which fixed by one piece of screw only, and the Driving Wheels and Steering Wheel could be changed easily and no need to hoist the whole vehicle.

Pallet Truck



#### Core Components from top Quality Brands

German KORDEL gear box, INTORQ Brake, WICK drive wheel, Italian ZAPI Controller ensure the high performance, efficiency and stability, at the same time reduce the running cost.



#### Static design of the hydraulic system

There is no movement of the hydraulic systems during lifting and lowering of the truck, ensures the stability and safety of the hydraulic system.

## Electronic proportional lifting and lowering

The electronically controlled proportional lifting system ensures accurate positioning and stacking operations at every lifting height.

In specific with high masts the electronic controlled proportional lifting performs at its best.

# PT20D



### Type sheet for industrial truck acc. to VDI 2198

<b>Distinguishing mark</b>	1.2	Manufacturer's type designation		PT20D		
	1.3	Drive		Battery		
	1.4	Operator type		Pedestrian		
		Load Capacity / rated load		2.0		
	1.5	Load Capacity / at mast lift	Q (t)	1.0 <sup>1)</sup>		
		Load Capacity / at support arm lift		2.0 <sup>1)</sup>		
	1.6	Load centre distance	c (mm)	600		
	1.8	Load distance ,centre of drive axle to fork	x (mm)	916		
	1.9	Wheelbase	y (mm)	1532		
<b>Weight</b>	2.1	Service weight	kg	990	1010	1060
	2.2	Axle loading, laden front/rear	kg	880/2110	890/2120	925/2135
	2.3	Axle loading, unladen front/rear	kg	648/342	658/352	965/365
<b>Tires, chassis</b>	3.1	Tires		Polyurethane (PU)		
	3.2	Tire size, front	Øx w (mm)	Ø230×70		
	3.3	Tire size, rear	Øx w (mm)	Ø80×70		
	3.4	Additional wheels(dimensions)	Øx w (mm)	Ø100×40		
	3.5	Wheels,number front/rear(x=driven wheels)		1x+2/4		
	3.6	Tread, front	b <sub>10</sub> (mm)	510		
	3.7	Tread, rear	b <sub>11</sub> (mm)	380		
<b>Dimensions</b>	4.2	Lowered mast height	h <sub>1</sub> (mm)	1178	1378	1233
	4.4	Lift	h <sub>3</sub> (mm)	1400	1800	2300
	4.5	Extended maximal height	h <sub>4</sub> (mm)	2808	3408	3678
	4.6	Initial lift	h <sub>5</sub> (mm)		120	
	4.9	Height of tiller in drive position min./ max.	h <sub>14</sub> (mm)		800/1335	
	4.15	Height, lowered	h <sub>10</sub> (mm)		88	
	4.19	Overall length	l <sub>1</sub> (mm)	1940		1955
	4.20	Length to face of forks	l <sub>2</sub> (mm)	790		805
	4.21	Overall width	b <sub>1</sub> (mm)		729	
	4.22	Fork dimensions	s/e/l (mm)		60/180/1150	
	4.25	Width across forks	b <sub>5</sub> (mm)		560/530	
	4.32	Ground clearance, centre of wheelbase	m <sub>2</sub> (mm)		28	
	4.34	Aisle width for pallets1000X1200 crossways	Ast (mm)	2140		2155
	4.34	Aisle width for pallets800X1200 lengthways	Ast (mm)	2190		2205
	4.35	Turning radius	Wa (mm)		1682	
<b>Performance data</b>	5.1	Travel speed, laden/ unladen	km/h	6.0/6.0		
	5.2	Lift speed, laden/ unladen	m/s	85/140		
	5.3	Lowering speed, laden/ unladen	m/s	80/65		
	5.8	Max. gradeability, laden/ unladen	%	8/20		
	5.10	Service brake		Electromagnetic		
	<b>Electric- engine</b>	6.1	Drive motor rating S2 60min	kW	1.3	
6.2		Lift motor rating at S3 10%	kW	2.2		
6.3		Battery acc. to DIN 43531/ 35/ 36 A, B, C, no		3VBS		
6.4		Battery voltage, nominal capacity K5	V / Ah	24/210		
6.5		Battery weight	kg	185		
6.6		Energy consumption acc. to VDI cycle	kWh/h	0.4		
<b>Additional data</b>	8.1	Type of drive control		AC speed Control		
	8.4	Sound level at driver's ear acc. to EN 12053	dB(A)	<70		

1)in double-deck operation:mast lift 1.0t,support arm lift 1.0t

